

DECK FLASHING SERIES

Ve

The ultimate in deck protection



UV Resistance

Photo: Courtesy of @robbinscustombuilders







gtape.com

Features

- Hand-tearable. No tools needed
- Adhesion improves with time
- No roller primer or heatgun needed
- Face-to-face contact doesn't effect adhesion providing less waste and easier workability
- Wide temperature range (-40°F to 200°F)
- All-weather (Self-healing technology protects -20°F to 200°F | -29°C to 93°C)
- High tensile strengthgalvanized metal and aluminum fasteners against corrosion
- AAMA 711-13 Level 3 Certified
- Self seals around fasteners

Nichigo G-Tape Board Application +48 hours +72 hours



3035BK

Apply Nichigo G-Tape[™] to the tops of joists, over ledger board and around posts to prevent wood rot for up to 20 years!



- Self-adhering flashing tape without a liner
- Easy application that does not pose a tripping hazard



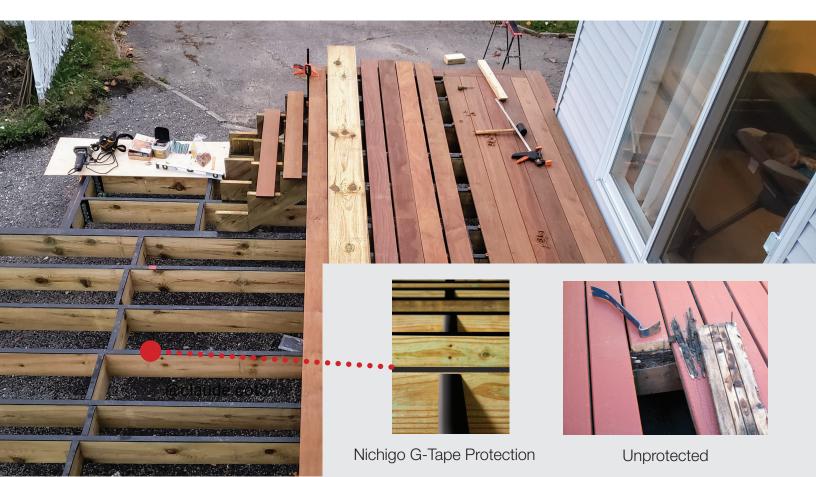


Photo: Courtesy of @claude.cot3



12" x 65'

Sizes

- Self-adhering flashing tape
- Adhesive self-heals around steel and • galvanized aluminum fasteners, protecting from rust and wood rot

3045BK

- Sizes 2" x 65' 4" x 65' 6" x 65' 9" x 65' 12" x 65'
- Premium, low surface energy flashing tape • with rubber binding sheet
- Can be applied to EPDM liners or other • waterproofing materials



The Ultimate in Deck Protection

G-tape is an ideal product solution to adhere to unique deck shapes for secure and lasting protection.

Photo: Courtesy of @claude.cot3



Photo: Courtesy of @claude.cot3



Photo: Courtesy of @claude.cot3



Photo: Courtesy of @alfanoconstruction



Chris Flynn Email: Chris.Flynn@m-chem.com

www.gtape.com